
eskaro
Life full of colors



Terrace

Terrace and façade oil

- ✓ Contains tung oil
- ✓ Penetrates the wood deeply
- ✓ Weather resistant
- ✓ Ensures a decorative appearance of the surface
- ✓ Can be tinted. Ready-made colours: brown and grey

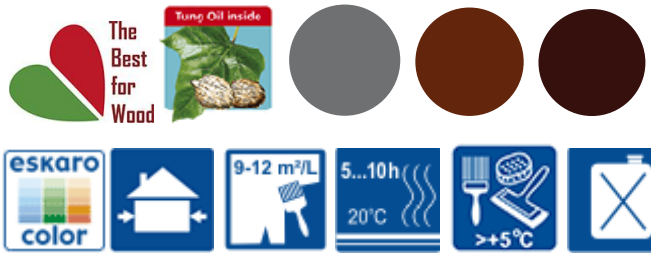

Description	
Properties	Decorative and protective decking oil for exterior wooden surfaces. ✓ Protects wood against weathering and prevents the spread of mould. ✓ Provides wood with a decorative finish. ✓ Penetrates deep into the wood, forming a water-repellent barrier within the pores and capillaries. ✓ Protects wood against decay, blue stain fungi, mould and the damaging effects of weathering. ✓ Contains a UV filter. ✓ Particularly suitable for treating planed wood. ✓ Dries quickly, forming a coating resistant to mechanical stress and cracking. ✓ Do not apply to previously painted or varnished surfaces. ✓ Colourless Terrace Decking Oil can be tinted. Maximum permissible EU VOC content for the product (subcat. f): 700 g/L. Maximum VOC content in the product <700 g/L.
Purpose	Recommended for treating terraces, facades, flooring and other horizontal surfaces as well as railings, stairs, fences, garden furniture etc. For outdoor use. Do not use on varnished or painted surfaces. Do not used on surfaces damaged by mould and algae growth.
Types of surfaces to be treated	Outdoor log, sawn and planed wooden surfaces; wood slabs; wood impregnated under pressure and untreated hardwood. Especially recommended for planed wood.
Quality standards and labels	✓ VOC (volatile organic compounds) – content in accordance with the European Union directive 2004/42/CE ✓ Product and service quality is guaranteed by the quality, environmental protection, occupational health and safety management system in accordance with standards ISO 9001:2015; ISO 14001:2015 and ISO 45001:2018
Product specifications	

Surface preparation before treatment	The wood surface to be treated must be dry, with a moisture content not exceeding 20%. The recommended application temperature is above +5°C, with a maximum relative humidity of 80%. Thoroughly clean the surface to be treated, removing grease, dust and other contaminants. Use WoodClean for cleaning and bleaching the wood (follow the product instructions for use). Surfaces treated with WoodClean must be thoroughly rinsed with water and allowed to dry. Remove all old paint from previously painted surfaces. Use the alkaline cleaning agent TerraceClean for the maintenance and deep cleaning of dirty and oiled surfaces. Replace any boards affected by wood decay or rot with new ones. Do not apply to surfaces affected by biological deterioration. The use of galvanised fasteners is recommended for fixing wooden components. Apply the biocidal deep-penetrating wood preservative primer Biostop to new or cleaned wood surfaces. Pressure-treated wood must be allowed to weather for at least 6 months before treatment with Terrace. Application is not recommended in hot weather, in direct sunlight, in strong winds, or during rain or fog. Ensure that the treated surface has sufficient time to dry before evening dew forms. Before treating exotic wood species, we recommend carrying out a test application of the oil on a small area or a separate board. Use galvanised fasteners to secure treated wooden components. Untreated metal parts (nail heads, fixing brackets) must be coated with an anti-corrosion primer. Pay attention to constructive wood protection measures, including proper drainage, ventilation, and waterproofing of walls and roofs. The effectiveness of wood preservatives depends on the implementation of adequate constructive wood protection measures. Follow the instructions for use of all the products mentioned above.
Application	Stir well before use and mix periodically during application. Apply 1–2 coats evenly from edge to edge along the wood grain, working on one to three boards at a time. Ensure that no areas are left untreated. Pay particular attention to treating the end grain. For dense timber decking boards, sanding or treatment with the alkaline cleaning agent TerraceClean is recommended before oiling to improve the wood's absorbency. If a second coat is required, apply it after the first coat has been absorbed into the wood. Remove any unabsorbed oil from the surface with a cloth 15–20 minutes after application. NB! The oil must not form a film on the surface. Excess oil will not dry properly and will make the surface sticky and sensitive to water. It is recommended to treat decking boards on the underside before installation as well. Surfaces exposed to weathering throughout the year should be treated once or twice a year, as required. When using tinted oil, products from the same batch should be selected and mixed together in a single container before use to ensure a uniform colour.
Care for the treated surface	Under normal conditions, the treated surface reaches peak wash-resistance in one week. Use water or a neutral detergent (pH 6–8) for cleaning. (For example, TerraceClean: 50 ml of product per 10 L of water.)
Colour	Colourless. Ready-made colours: grey, brown and dark brown.
Tinting	Machine tinting according to the Eskarocolor system (base EC). The resulting hue depends on the wood species and the number of coats.
Consumption	5–15 m^2/L per coat
Drying time	16–24 hours (at +23°C and 50% relative humidity). Drying time depends on weather conditions, the type of wood and the application method.
Tools	Brush, sponge, terrace pad.
Tool cleaning	Wash with White-Spirit after completing work.
Information	
Frost resistance	Frost-resistant
Storage conditions	Store in a tight container at the temperature < 30 °C. Protect from direct sunlight. Store locked up.
Safety precautions	 **Danger.** Hazardous to the aquatic environment, long-term hazard. Harmful to aquatic life with long lasting effects. May be fatal if swallowed and enters airways. Causes serious eye irritation. Contains: hydrocarbons, C10-C13, n-alkanes, isoalkanes, cyclics, <2% aromatics. Contains 4,5-dichloro-2-octyl-2H-isothiazol-3-one, Cobalt bis(2-ethylhexanoate). May produce an allergic reaction. May produce an allergic reaction. Repeated exposure may cause skin dryness or cracking. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves/face protection/protective clothing/protective footwear. IF SWALLOWED: Immediately call a POISON CENTER/doctor. HC00-70S9-D002-GDWS. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing
Waste treatment	Avoid release to the environment. Oily rags, waste, and other oily materials can cause spontaneous combustion fires if not handled properly. Spray dust, cloth and other contaminated material should be wetted and placed in a metal container. Store in a fire-proof place. Dispose of the contents/containers in accordance with the current legislation on waste treatment. Waste treatment methods: code 08 01 11*- Waste paint and varnish containing organic solvents or other dangerous substances; waste class: dangerous (Regulation (EU) No 1357/2014).
Density	0,8 kg/L
Volume/weight	0.9 L – 2.7 L – 4,5 L – 9 L

The information concerning the product is based on the results of laboratory tests and practical use of the product depending on the location and conditions of its use. As the manufacturer, we guarantee the quality of the product and provide the best recommendations for its appropriate application. As the manufacturer, we cannot control the conditions and circumstances of product transportation, storage and application and numerous other factors that affect its use. Thus, we shall not bear responsibility for the damage caused by ignoring the instructions for use or transportation, by noncompliance with storage conditions and timeframes or by inappropriate application of the product. The manufacturer reserves the right to alter product information at their discretion without prior notice. For additional information, please contact us: https://eskaro.ee/en/contact/